




HDM (Hydrobond Deck Mate) Surface Mateable Connector HDM_06-02

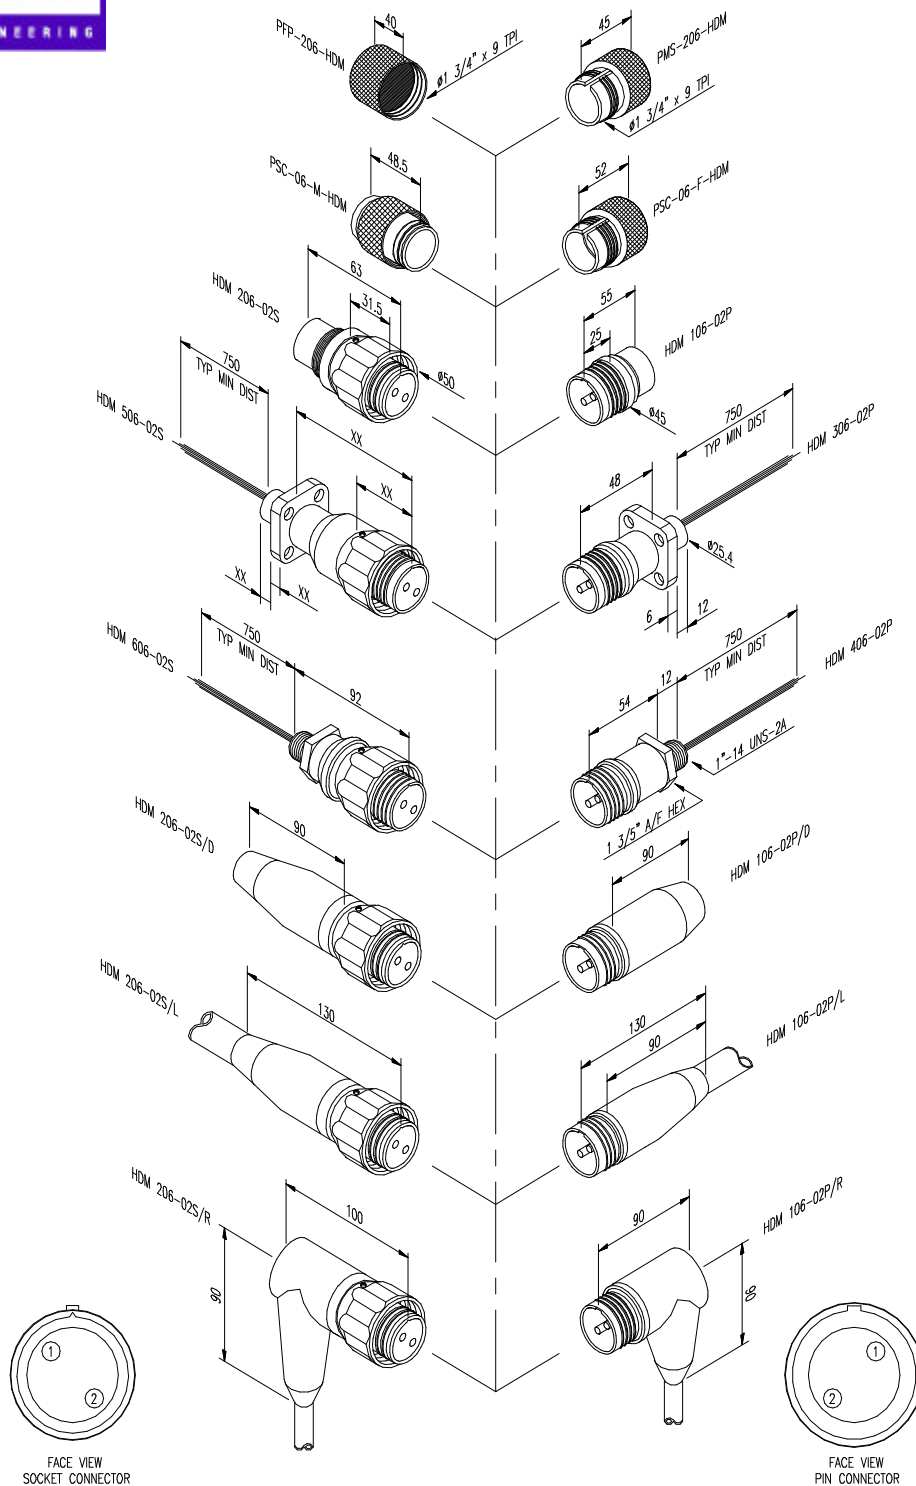

Electrical and Environmental:

Pin Current Rating: 95 Amps
 Pin Voltage Rating: 1,500 V rms
 Contact to Contact IR: >1,000 MOhms @ 1,000 V dc
 Contact to Body IR: >1,000 MOhms @ 1,000 V dc
 Mated Depth Rating: 3,450 MSW
 Temperature Rating: -20 °C to +60 °C
 Conductor Tail Size: 25 sq.mm
 Solder Bucket Size: 5.85 mm dia

Standard Material Specification:

Body: 316 Stainless Steel
 Fix Ring: Aluminium Silicon Bronze
 Back Shell: N/A
 Contact Pins: CZ121/Au
 Contact Sockets: CZ121/Au
 Insert Material: Peek
 Conductor Tails: Polyrad X 1.0 m.
 O – Rings: NI70

Data Sheet:

Issue: 01
 Approved by:

Mechanical:

Lengths = mm
 Threads = Inches
 Mounting Detail:
 See Mounting Detail
 Section of Binder