HRS (Hydrobond Rubber Sealing) Underwater Mateable Connector HRS_08-12

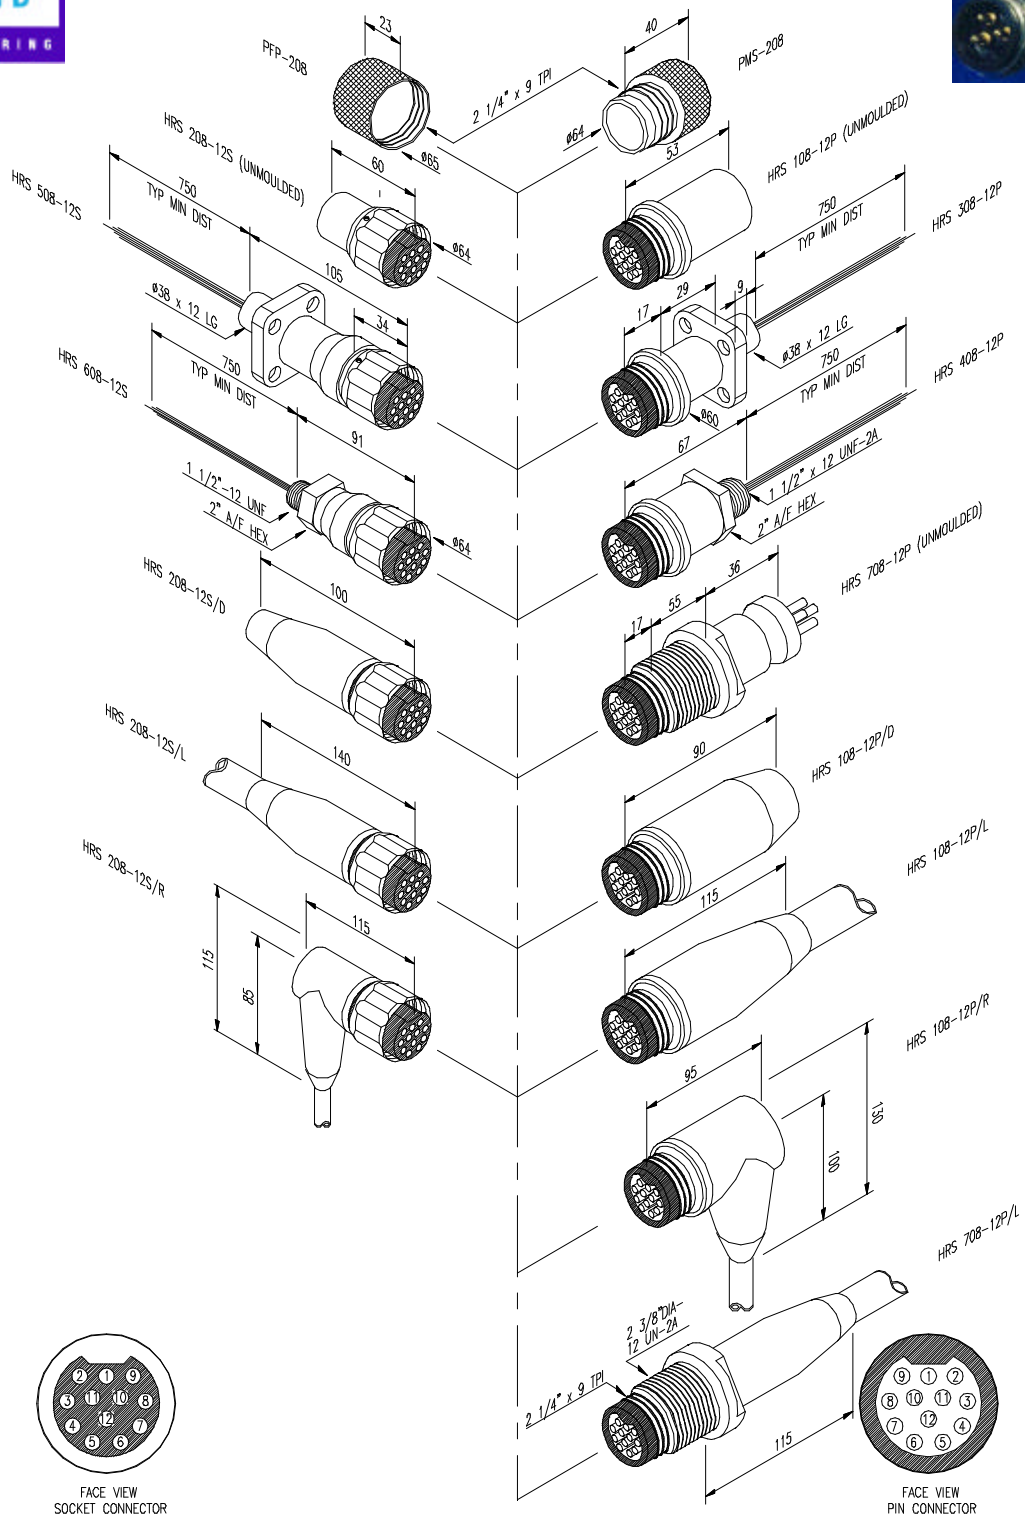

Electrical and Environmental:
Pin Current Rating: 12 Amps
Pin Voltage Rating: 2,000 V rms
Contact to Contact IR: >1,000 MOhms @ 1,000 V dc
Contact to Body IR: >1,000 MOhms @ 1,000 V dc
Mated Depth Rating: 2,440 MSW
Temperature Rating: -20 ° C to +60 ° C
Conductor Tail Size: 12 AWG
Solder Bucket Size: 3.0 mm dia

Standard Material Specification:
Body: 316 Stainless Steel
Fix Ring: Aluminium Silicon Bronze
Back Shell: N/A
Contact Pins: CZ121/Au
Contact Sockets: CZ121/Au
Insert Material: Neoprene
Conductor Tails: Spec 44 X 0.75 m.
O – Rings: NI70

Data Sheet:
Issue: 01
Approved by:

Mechanical:
Lengths = mm
Threads = Inches
Mounting Detail:
See Mounting Detail Section of Binder